

Jamsill Guard®
The ORIGINAL Sill Pan Flashing Since 1983

DOOR and WINDOW SILL PAN FLASHING

See Jammin' Jimmy
and Buff in our New
Technical videos at
jamsill.com


"I use Jamsill Guard
sill pan flashing on all
my door and window
installations."

- Jammin' Jimmy




Doors

1. Install lower course of house-wrap. Place left and right corners tight against framing. Measure center section and cut if necessary maintaining a minimum $1\frac{1}{2}$ " overlap at glue joints. Center section must fit within recessed areas of corner pieces.

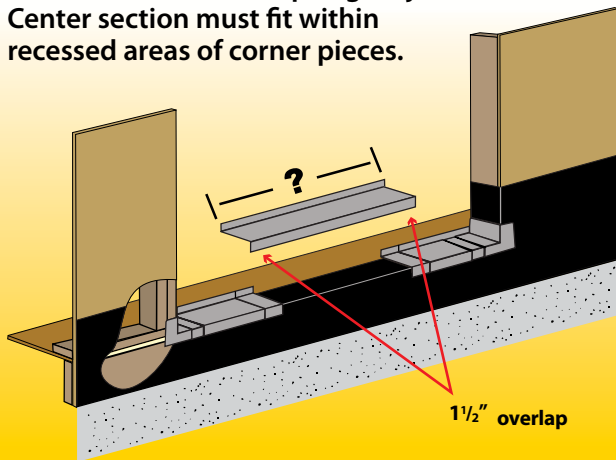


Windows


1. Install lower course of house-wrap. Place left and right corners tight against framing. Measure center section and cut if necessary maintaining a minimum $1\frac{1}{2}$ " overlap at glue joints. Center section must fit within recessed areas of corner pieces.

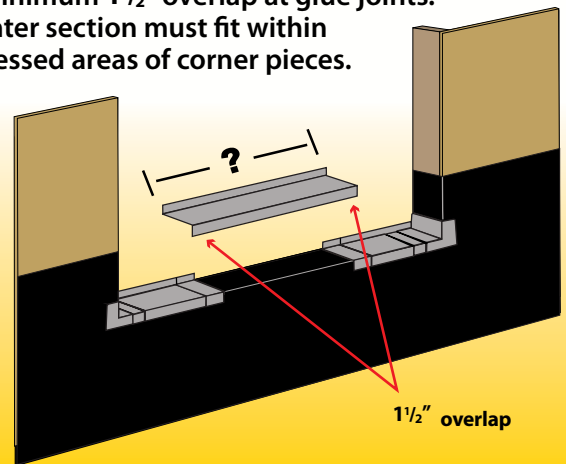


2. Apply PVC cement to the recessed areas of the corner pieces and the underside of the center section where it overlaps the recessed areas. Hold or clamp pieces together long enough to ensure a complete bond.

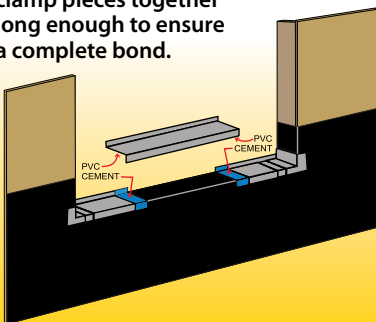


3. Remove pan and apply caulking where the pan will contact the framing. Set pan in caulking.

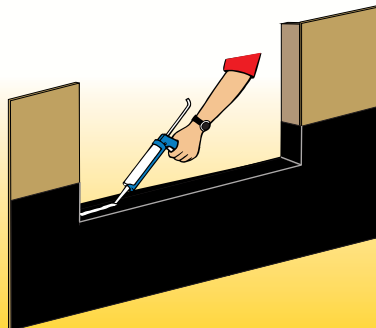


4. Apply caulking to interior edge of pan to seal window frame/door sill to pan. Apply caulking to glue joints for added protection. Adhere flexible flashing to sides of opening, wrapping around from sheathing to studs and shingle over and into the sill pan.

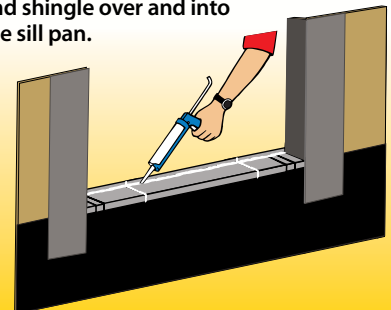

5. Install door. Do not block sloped weep areas.

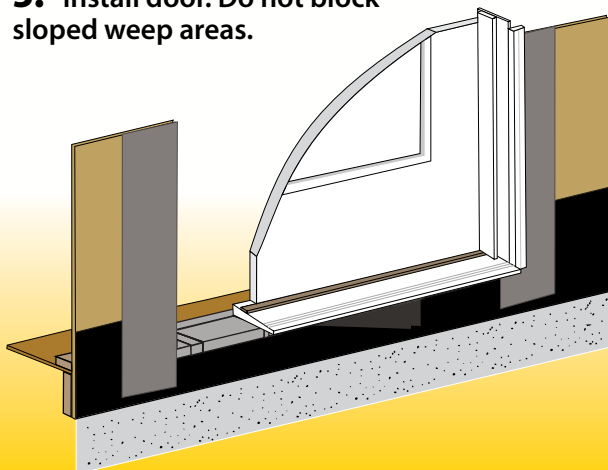

5. Install window. Do not block sloped weep areas.

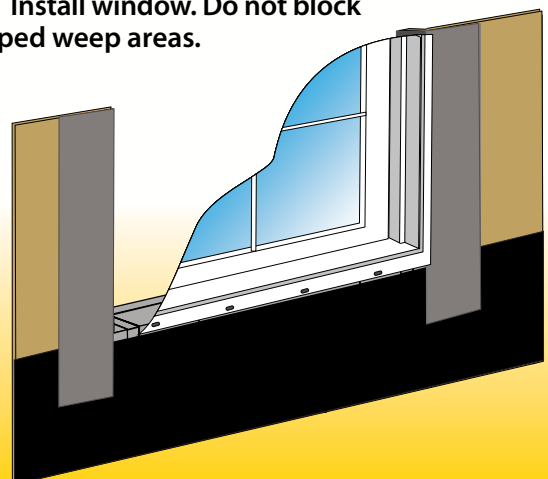

Jamsill Guard®

The ORIGINAL Sill Pan Flashing Since 1983

Jamsill Guard® is an adjustable sill pan flashing for exterior doors and windows, designed to prevent water damage from window and door leaks.

Jamsill Guard® is injection molded and extruded from high impact ABS plastics that do not facilitate thermal transfer and will not deteriorate or corrode over time. In fact, Jamsill Guard® has been time tested for over 30 years with over two million sold.

Jamsill Guard's simple design is inexpensive, easy to install and more user friendly than other sill pans on the market. Jamsill Guard's multiple piece, telescoping design allows the installer on-site adjustability, to fit all rough openings and is bonded together in the field with PVC cement.

- Reduce call-backs due to water damage
- Quick, simple and adjustable installation
- Sloped weep areas direct moisture out
- Glue joints located away from door and window leak areas
- Multiple-piece design and large glue tabs allow adjustability during install
- Accommodates virtually any size opening
- Available in many depths to fit any application
- Visit jamsill.com for more information

TEN DEPTHS AVAILABLE

1 1/8
1 7/8
2 3/8
3 1/4
3 5/8
4 1/8
4 9/16
5 1/4
6 9/16
6 13/16

Most leaks originate at...

The Critical Corner



One-piece molded corners block leaks before they can damage the framing and sub-floor.



Sloped weep areas located directly beneath the jamb-to-sill joint directs moisture toward the exterior.



Large glue joint located well away from the jamb-to-sill joint.



Buff

Please contact us at:

Tel: 1-800-JAMSILL • Fax: 1-541-488-7472 • web: jamsill.com

1-800-JAMSILL
(1-800-526-7455)

Jamsill Guard®

The ORIGINAL Sill Pan Flashing Since 1983

jamsill.com

**Framed opening
for door or window**

ADJUSTABLE SILL PAN FLASHING
THAT PREVENTS MOISTURE
DAMAGE FROM LEAKING
DOORS AND WINDOWS

**Large glue tab area
for adjustability**

**Sloped weep area
directs moisture out**

Sub-floor

Rim-joist
or Slab



Jamsill Guard®

The **ORIGINAL** Sill Pan Flashing since 1983

Jamsill, Inc. • P.O. Box 485 • Talent, OR 97540

1-800-JAMSILL (526-7455) • jamsill.com

